



**LEAD-ACID RECHARGEABLE BATTERY**  
**MODEL: BT-12M1.3AT (12V 1.3Ah)**




**Application**

- ☆ Measuring equipment and instrument
- ☆ Telephone sets
- ☆ Lighting equipment
- ☆ Security systems

**General Features**

- ☆ Designed floating charging service life: 8 years (25°C)
- ☆ Sealed and maintenance free operation
- ☆ Safety valve installation for explosion proof
- ☆ Low self-discharge characteristic
- ☆ Wide operating temperature range from 10°C-40°C
- ☆ Lead Calcium Aluminum Tin alloy high energy, prevent corrosion

PHYSICAL SPECIFICATIONS		
Nominal Voltage		12V
Nominal Capacity (20HR)		1.3AH
Dimensions	Length	97±1mm
	Width	44±1mm
	Container height	52±1mm
	Total Height (with terminal)	58±1mm
Weight±3%		Approx 0.50 Kg(1.10lbs)
Internal Resistance(In full charge status)		≈67.4mΩ
Standard Terminals		F0 (standard)

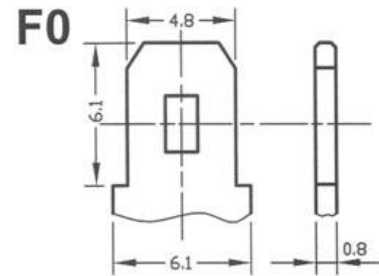

ELECTRICAL SPECIFICATIONS		
Rated Capacity	20 hour rate(65mA)	1.30AH
	10 hour rate(130mA)	1.23AH
	5 hour rate(208mA)	1.04AH
	27 minute rate(1.3A)	0.59AH
	7 minute rate(3.9A)	0.455AH
Capacity affected by Temperature (20Hour Rate)	40°C (104°F)	103%
	25°C(77°F)	100%
	0°C(32°F)	86%

Constant Current Discharge Data Sheet ( Amperes at 25°C)										
End Voltage/cell	Minute (M)				Hour (H)					
	5	10	20	45	1	2	4	8	10	20
1.70	4.81	3.13	1.75	0.91	0.74	0.46	0.26	0.153	0.122	0.067
1.75	4.77	3.10	1.735	0.90	0.74	0.445	0.255	0.1515	0.121	0.066
1.80	4.72	3.07	1.72	0.89	0.73	0.43	0.25	0.150	0.120	0.065

- Cycle Application**
1. Limit initial current less than 0.325A.
  2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C (77°F).
  3. Hold at 14.1V to 14.4V until current drop to under 0.008A for at least 3 hours.
  4. Temperature compensation coefficient of charging voltage is -30mV/°C.

Constant Power Discharge Data Sheet (Watt at 25°C)										
End Voltage/cell	Minute (M)				Hour (H)					
	5	10	20	45	1	2	4	8	10	20
1.70	57.7	37.6	21.0	10.9	8.88	5.52	3.12	1.84	1.45	0.785
1.75	57.2	37.2	20.8	10.8	8.82	5.34	3.06	1.82	1.44	0.779
1.80	56.6	36.8	20.6	10.7	8.76	5.16	3.00	1.80	1.43	0.774

- Standby Service**
1. Hold battery across constant voltage source of 13.6 to 13.8 volts with current limit 0.325A continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charge status.
  2. Temperature compensation coefficient of charging voltage is -18mV/°C.


**NOTE:** The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfating.




**LEAD-ACID RECHARGEABLE BATTERY**  
**MODEL: BT-12M1.3AT (12V 1.3Ah)**




**Charge Characteristics**

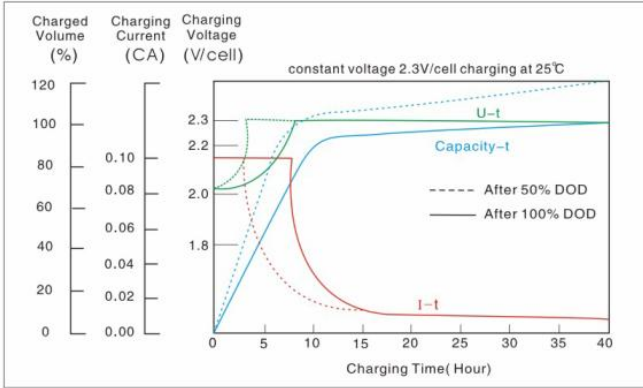


**Discharge Current & Discharge Duration Time (25°C/77°C)**

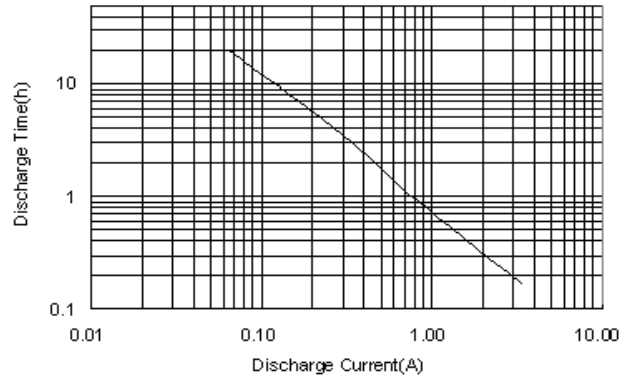


**Discharge Characteristic (25°C/77°C)**

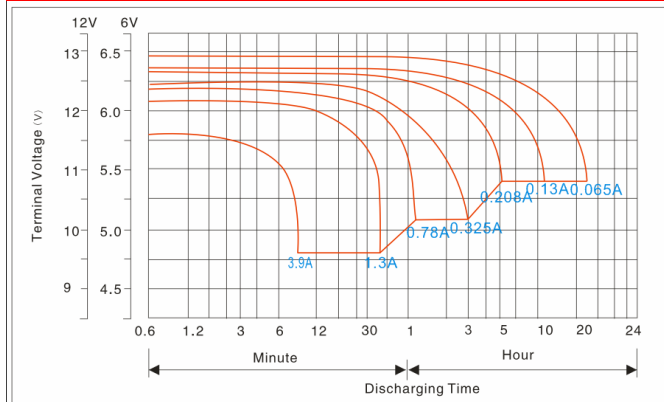

**The Relationship Between Lifetime and Depth Of Discharge(25°C/77°F)**

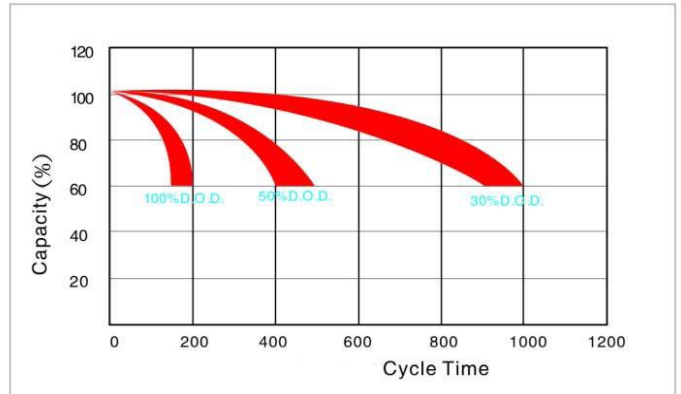

**Capacity Curve at Different Temperature**

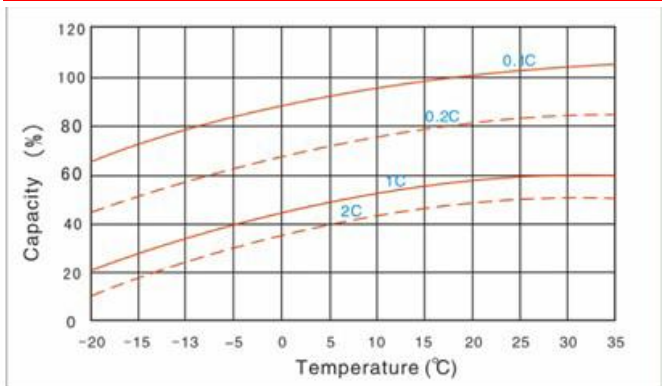

**Storage Characteristics**

